
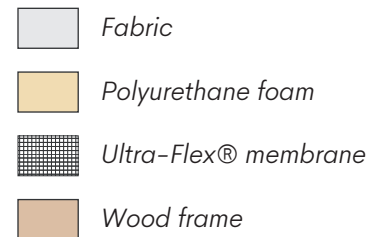


Lounge

Fjord Armchair

Product disassembly guide
page 1/2

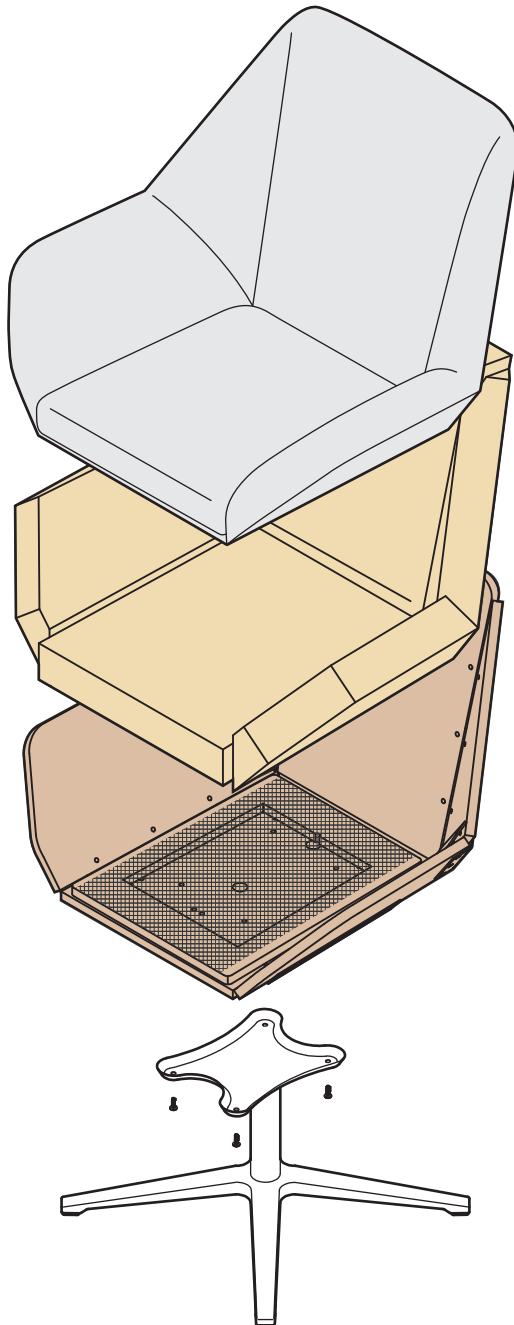

DISASSEMBLY INSTRUCTIONS


1. SOFT MATERIAL

- Unscrew the base from the armchair.
- Use a knife to cut and remove the fabric under the seat.
- Use pliers to remove the staples holding the fabric under the seat and remove the fabric covering the polyurethane foam.
- Remove the polyurethane foam covering the wood frame.
- Use pliers to remove the staples and the Ultra-Flex® membrane.

Lounge

Fjord Armchair

Product disassembly guide
page 2/2

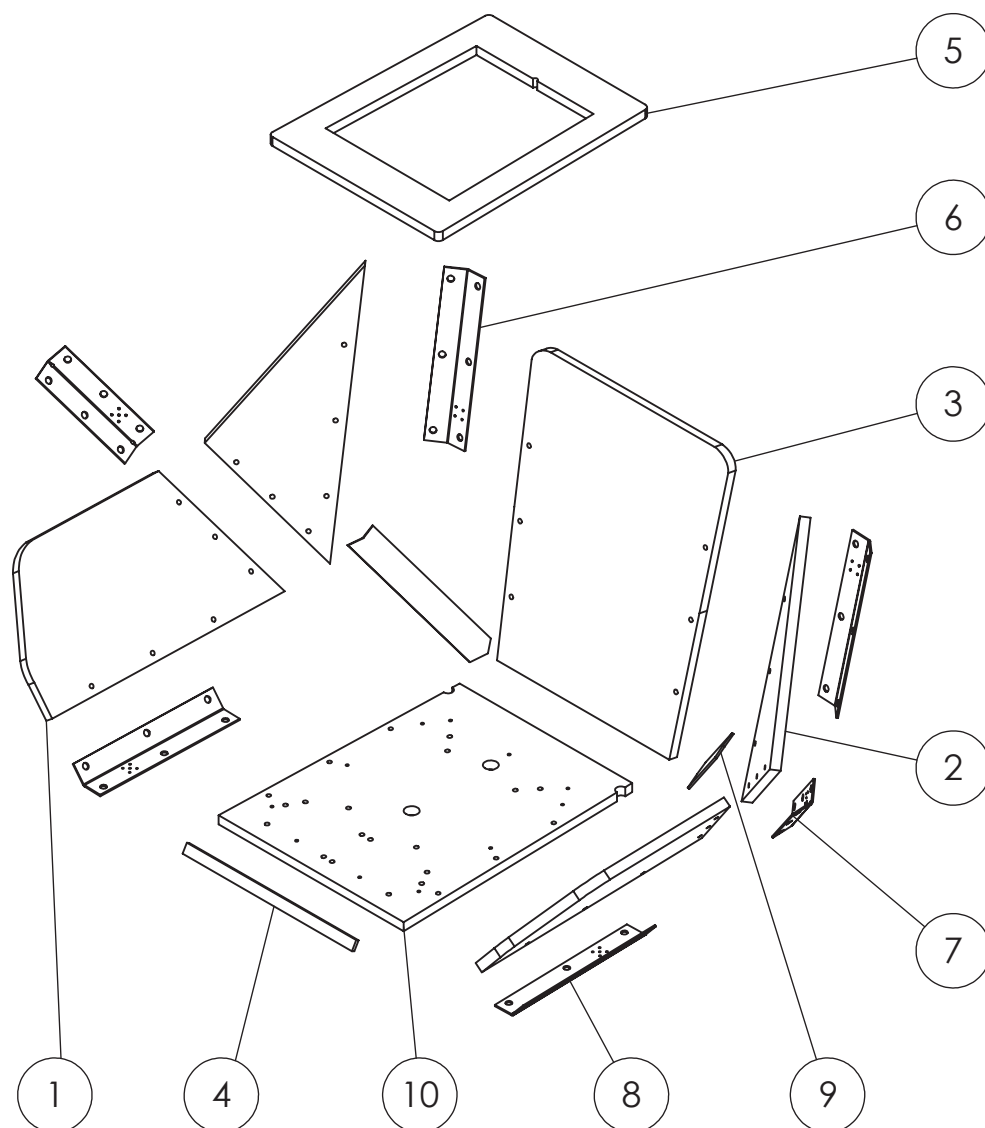

No.	Description	QTY	Materials
1	Armrests	2	Plywood
2	Armrest backsides	2	Plywood
3	Backrest	1	Plywood
4	3/4" x 15" strip	1	MDF
5	Flex seat	1	Plywood
6	42° x 12" connection plate	2	Steel
7	50° x 8" connection plate	2	Steel
8	50° x 12" connection plate	2	Steel
9	2" x 11 1/2" strip	2	MDF
10	Fixed seat	1	Plywood

2. WOOD FRAME

- Unscrew and remove the seat (5).
- Unscrew and remove the connection plates (6-7-8)