


Downtown Connection - M8


COMPONENTS INCLUDED WITH DOWNTOWN CONNECTION

- 1 x electrical box, HDMI cable with four inputs.
- 4 x HDMI data sharing cables (6' long).
- 1 x HDMI cable for monitor (12' long).
- 1 x cable connection access module (with mobile outlet ECM - power cord: 9').
- 1 x power bar (EPUP - power cord: 9').

ELECTRICAL BOX, HDMI CABLE WITH FOUR INPUTS

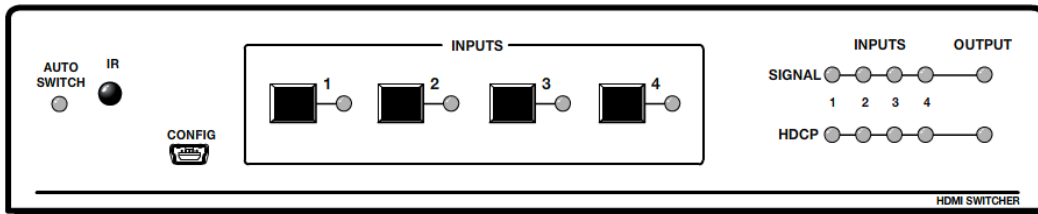

Front

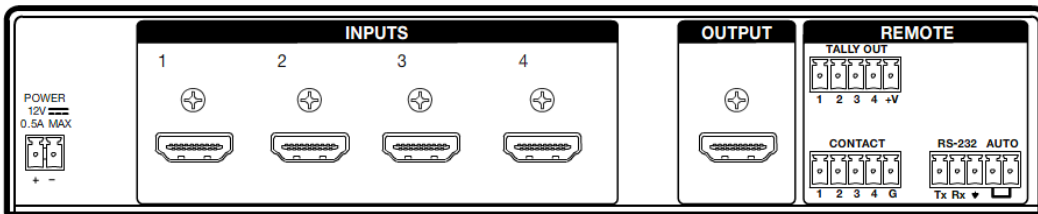

Rear

Enclosure dimensions	8 3/4" W x 3" D x 1 3/4" H
Power supply	Input: 100-240 VAC, 50-60 Hz Output: 12 VDC, 1 A, 12 watts Electrical component(s) certified to electrical standards applicable in the United States and Canada.

Video

Maximum data rate	6.75 Gbps (2.25 Gbps per color)
Maximum pixel clock	165 MHz
Resolution	Up to 1920 x 1200 or 1080p @ 60 Hz, 12-bit color
Formats	RGB and YCbCr digital video
Standards	DVI 1.0, HDMI, HDCP

Video input

Number/signal type	4 single link HDMI
Connectors	1 female HDMI type A

Control/remote - switcher

Serial control port	(1) RS-232, 3.5 mm captive screw connector, 5 pole (shared with auto-input switching control)
Pin configuration	1 = Tx, 2 = Rx, 3 = GND
Baud rate and protocol	9600 baud, 8 data bits, 1 stop bit, no parity
Auto-input switching	(1) 3.5 mm captive screw connector, 5 pole (shared with RS-232)
Pin configuration	Pins 4 and 5 of captive screw connector shared with RS-232 shorted together enable auto-input switching
Contact closure	(1) 3.5 mm captive screw, 5 pole
Pin configuration	Pin 1 = input 1 contact Pin 2 = input 2 contact Pin 3 = input 3 contact Pin 4 = input 4 contact Pin 5 = GND
Tally output	(1) 3.5 mm captive screw, 5 pole
Pin configuration	Pin 1 = input 1 tally ground Pin 2 = input 2 tally ground Pin 3 = input 3 tally ground Pin 4 = input 4 tally ground Pin 5 = +5 V